


8 way OS light source board

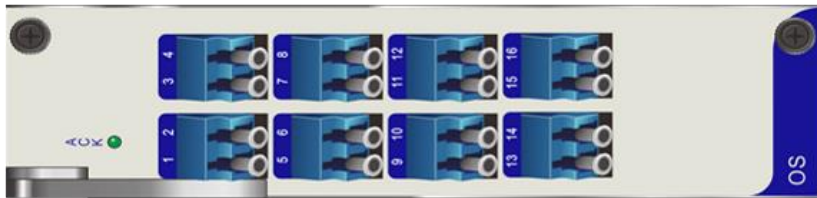

16 way OS light source board

OS Card

Product Description

OS card provides multi-channel stable light source for real-time monitoring of lines and OPM card combination.

Product Features

- High stability
- Two types of cards are available

Product Specification

Parameter	Index
Operation wavelength	1550±20nm
Spectral width	≤4 nm
Output power	≥-7 dB (8 channels) ≥-13 dB (16 channels)
Stability	±0.02/15min
Card width	1 standard slot (8 channels) 2 standard slots (16 channels)
Connector type	LC/UPC
Maximum power consumption	5W